

FLOAT BATTERY CHARGERS

UNFILTERED-SCR SERIES
FILTERED-SCRF SERIES

SINGLE PHASE INPUT
THREE PHASE INPUT



Applications for:

UTILITY & GENERAL INDUSTRY

- Switchgear
- Engine Starting
- Emergency Lighting
- Alarm Systems
- Railroad Service
- UPS

COMMUNICATIONS & TELECOMMUNICATIONS

- Radio
- Telemetry
- Microwave
- Telephone

COMPUTERS & CONTROL SYSTEMS

- Uninterruptible Power Systems



362 Highway 31
Flemington, New Jersey 08822
Tel: 908/782-5525
Fax: 908/782-9733
www.hitrancorp.com




FLOAT BATTERY CHARGERS

UNFILTERED
SCR SERIES

FILTERED
SCRF SERIES

SINGLE PHASE INPUT
THREE PHASE INPUT

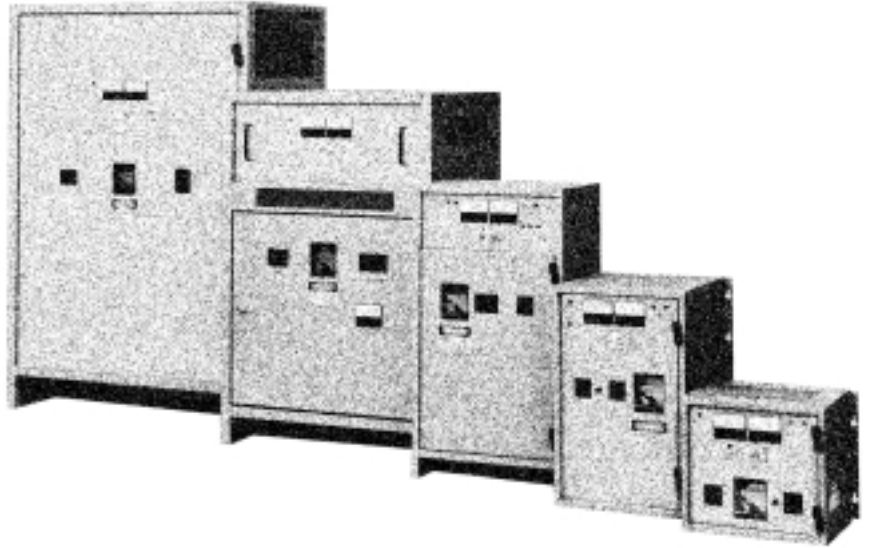

GENERAL DESCRIPTION

Hitran's SCR/SCRF Series of industrial float chargers is designed to automatically control charging rates for a wide variety of battery types and to simultaneously provide full rated output for both continuous and intermittent DC loads.

The chargers are constant voltage devices with automatic current limiting. Voltage regulation and current limiting are controlled by solid state integrated circuitry to assure maximum performance in minimum space.

The SCR/SCRF Series is ideally suited to utility, communications and other stationary charger applications.

DESIGN FEATURES

■ **Component Selection** – Electronic and electrical components are substantially derated to assure long life and reliability. Typical MTBF is 100,000 hours minimum. Components are selected or designed to provide a system life expectancy in excess of 30 years.

■ **Modular Construction** – Control circuits, alarm circuits and electrical sub-assemblies are printed circuit board wired or modularized with plug and socket connections for easy serviceability.

■ **Standard Sub-assemblies** – Control modules and many electrical sub assemblies are standardized across the entire range of charger sizes. This minimizes spare parts inventory and simplifies maintenance.

■ **Durable** – Front panels are recessed to prevent accidental damage to meters and controls. Standard cabinets are NEMA-1 enclosures of heavy gauge phosphatized steel with an attractive, long lasting acrylic enamel finish.

■ **Easy Trouble-shooting** – A complete service manual, color coded wiring, test point identification and circuit symbol labeling of internal components make trouble-shooting easy.

■ **Ease of Adjustment** – Tap adjustments are not required. Output float voltage, equalize voltage, current limit and alarm levels are potentiometer adjustable.

■ **Ease of Access** – Internal components and connections are easily accessible and/or removable through a hinged front door that opens approximately 180 degrees for easy serviceability.

■ **Ease of Installation** – Cabinets are floor, wall or rack mountable and equipped with knockouts for cable or conduit entrance. Input, output and remote alarm connections are wired to easily accessible, internal terminal blocks.



ENVIRONMENTAL SPECIFICATIONS

■ **Operating Ambient Temperature** – 32°F to 122°F (0°C to 50°C) without derating.

■ **Storage Temperature** – -40°F to 185°F (-40°C to 85°C).

■ **Operating Altitude** – 3300 feet (1000 meters) above sea level without derating.

■ **Relative Humidity** – 5% to 95% (without condensation).

■ **Audible Noise** – Less than 65dBA at any point 5 feet from any vertical surface of enclosure. Typical values measure 55 to 60dBA at 100% load.

■ **Ventilation** – Units rated 300Adc output or less are convection cooled via NEMA-1 vent openings in cabinet. Units rated 400Adc output or greater have fan assisted convection cooling with overheat audible alarm and remote alarm contacts. (Automatic charger shutdown due to overheat is optional.)

SCR/SCRF BATTERY CHARGER DC OUTPUT TABLE

VDC NOMINAL	FLOAT ADJUSTMENT RANGE (VDC)	EQUALIZE ADJUSTMENT RANGE (VDC)	ADC SIZE RANGE AVAILABLE (1)		LEAD-ACID CELL CAPABILITY (2) (NO. OF CELLS)		NI-CD CELL CAPABILITY (3) (NO. OF CELLS)	
			1 ϕ INPUT	3 ϕ INPUT	NORMAL (4)	REDUCED (4)	NORMAL (4)	REDUCED (4)
12	10.5 - 14.5	11.3 - 16	6 to 100	60 to 100	5 - 6		8 - 10	
24	23 - 30	24.5 - 32	6 to 100	50 to 600	11 - 13		17 - 20	[21]
48	46 - 60	48 - 64	6 to 100	50 to 600	22 - 26	[27]	34 - 40	[42]
130	115 - 140	124 - 150	6 to 50	25 to 600	55 - 62	[63]	86 - 94	[98]
260	230 - 280	245 - 300	6 to 25	16 to 300	110 - 124	[126]	172 - 188	[196]

(1) The discrete Adc sizes offered within the ranges listed above are: 6, 12, 16, 20, 25, 30, 35, 40, 50, 60, 75, 100, 125, 150, 175, 200, 250, 300, 400, 500, 600Adc. All sizes are rated at 100% load. Some current ratings are not available on certain chargers. Consult factory or current price list for exact offerings.

(2) Based on Lead-Acid Float of 2.15 to 2.25V/Cell and equalize of 2.25 to 2.4V/Cell.

(3) Based on Ni-Cd Float of 1.35 to 1.45V/Cell and Equalize of 1.50 to 1.60V/Cell.

(4) Greater cell capability indicated by [xx] can be obtained by slightly reducing float and equalize settings.

ELECTRICAL SPECIFICATIONS

■ **AC Input** – Standard transformers are available with taps for nominal voltages as listed below.

■ **Single Phase Voltages:**

- 120/220 – 240V 47 – 63Hz
- 480V 57 – 63Hz
- 120/208 – 240V 47 – 63Hz (optional)

■ **Three Phase Voltages:**

- 208 – 240V 57 – 63Hz
- 380 – 416V 47 – 63Hz
- 480V 57 – 63Hz

Chargers are wired and circuit protected for one nominal input voltage and frequency to be specified at time of order.

■ **Output Regulation**

- $\pm 0.5\%$ of DC voltage setting maintained with input line variations of -12% , $+10\%$ voltage and/or $\pm 5\%$ frequency.
- $\pm 0.5\%$ of DC voltage setting maintained with load variations from no load to full load.
- $\pm 1.0\%$ of DC voltage setting maintained against the combined variations of line, load and temperature.

■ **Output Transient Response & Recovery**

- $\pm 5.0\%$ max. of DC voltage setting maintained with step load changes from 20% to 100% load.
- Recovery to $\pm 2.0\%$ of DC voltage setting typically 200msec.
- Recovery to steady state DC voltage setting typically 500msec.
- Overshoot of DC voltage setting is not present at turn-on due to "soft-start" feature.

■ **Output Current Limit**

The electronic current limiting circuitry is factory set at 110% of rated output. It is continuously adjustable from 90% to 120% of rated load.

■ **Output Ripple and Electrical Noise***

- Unfiltered (SCR Series): Output ripple voltage is less than 10% RMS for single phase input SCR units. Output ripple voltage is less than 3% RMS for three phase input SCR units.
- Filtered (SCRF Series): Output ripple voltage is 30mVrms or less for all SCRF units. Electrical voice band noise is less than 32dBnC using C-message weighting network.

**Measured when connected to a battery with an 8hr Amp-Hour rating of 4 times the full load current rating of the charger.*

■ **Random Parallel Operation** – SCR/SCRF Series Chargers may be random parallel operated with other chargers of similar regulation and current limit characteristics. Equal load sharing by two SCR-SCRF chargers requires the addition of the forced load sharing option.


■ **Battery Eliminator Operation** – SCR/SCRF Series Chargers will operate as DC power supplies without batteries. Addition of the Filtered Battery Eliminator option will reduce ripple, when used as a battery eliminator, to a maximum of 0.6% of DC voltage.



Typical front panel control and indicator detail showing Combined Alarm – Status Charger Monitor option.



TYPICAL SCR/SCRF SERIES ONE-LINE CIRCUIT DIAGRAM

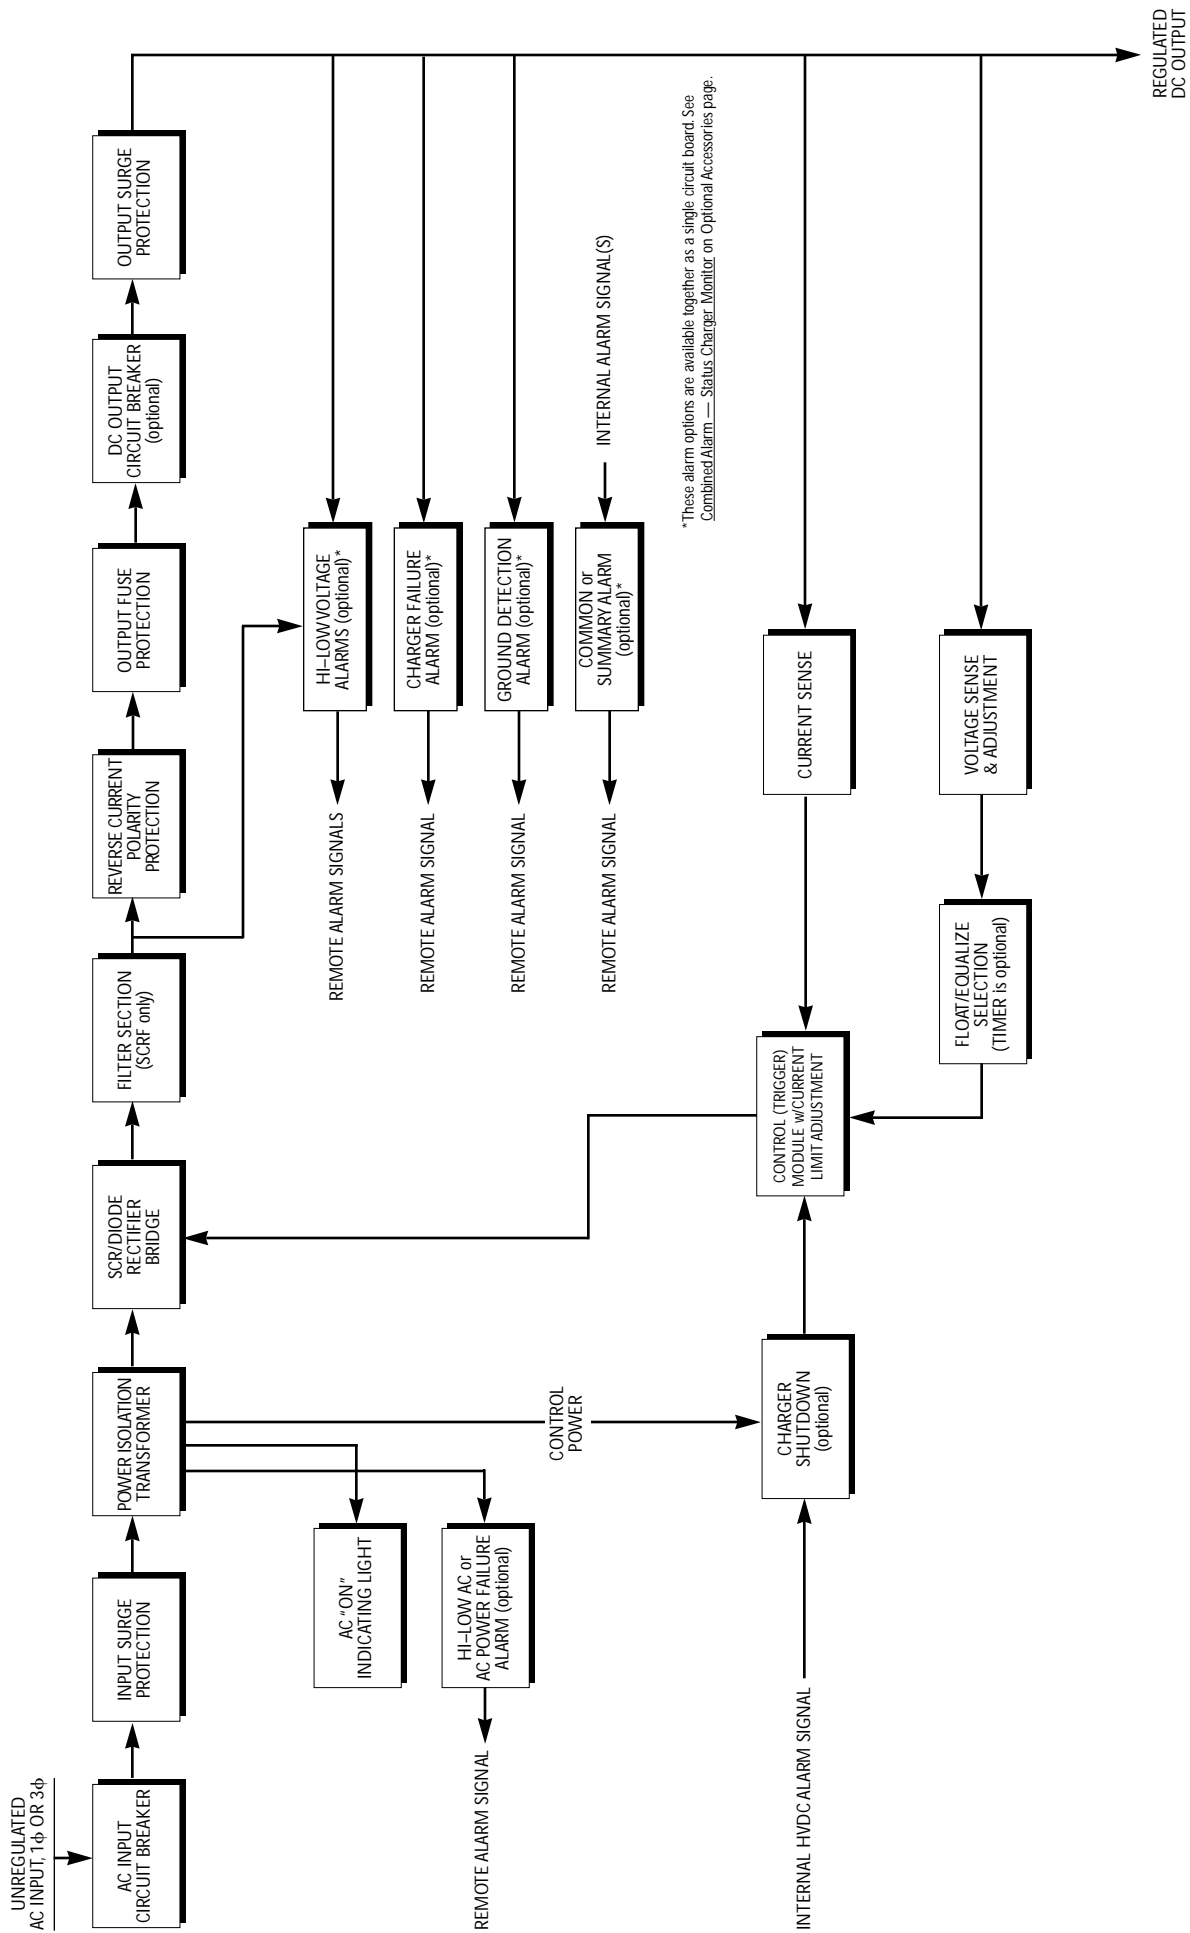

*These alarm options are available together as a single circuit board. See Combined Alarm — Status Charger Monitor on Optional Accessories page.

SCR/SCRF BATTERY CHARGER STANDARD ACCESSORIES

■ **AC On Indicating Light** – Green front panel indicator.

■ **AC Input Circuit Breaker**

Single Phase Input:

- Two-pole, 7500 A.I.C., UL Listed 100A-Frame.

Three Phase Input:

- Three-pole, 7500 A.I.C., UL Recognized 100A-Frame.
- Three-pole, 25000 A.I.C., UL Listed 225A-Frame.
- Three-pole, 30000 A.I.C., UL Listed 400A and 600A-Frame

■ **DC Output Fuses** – Two-pole fast acting, current limiting rectifier type.

■ **AC and DC Surge Suppressors - MOV Type** –

AC Withstand:

- 240Vac or less: 1500Vpk - 1.2x20 μ sec pulse.
- Over 240Vac: 3000Vpk - 1.2x20 μ sec pulse.

DC Withstand:

- All DC outputs: 4000Vpk - 1.2x10 μ sec pulse.

■ **DC Output Ammeter and Voltmeter** – Front panel, 2% accuracy, 3.5 inch case.

■ **Manual Float/Equalize Switch** – Front panel toggle switch.


■ **Float and Equalize Adjustment Potentiometers** – Two front panel mounted, lockable adjustment potentiometers.

■ **Current Limit Adjustment Potentiometer** – Internally mounted, with easily accessible adjustment.

■ **DC Output Blocking Diode** – Standard SCR/SCRF Series feature prevents battery from discharging back through the filter and rectifier when charger is "off" due to AC power failure or charger malfunction.





■ **DC Output Protection Diode** – Prevents damage to charger and battery due to reversed polarity connections.

■ **Color-Coded Internal Wiring** – 600 Volt, color-coded, polyvinylchloride (PVC) wiring is standard.

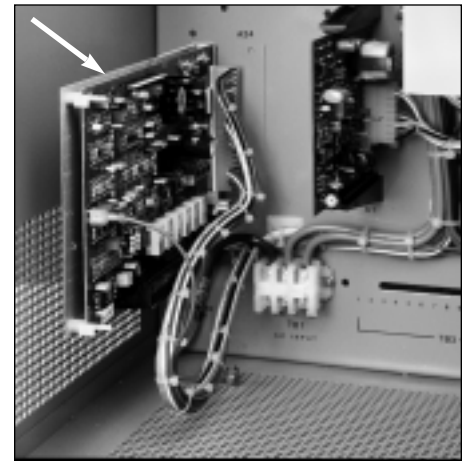

Typical internal construction detail showing Combined Alarm – Status Charger Monitor option

TYPICAL SCR/SCRF PERFORMANCE CURVES

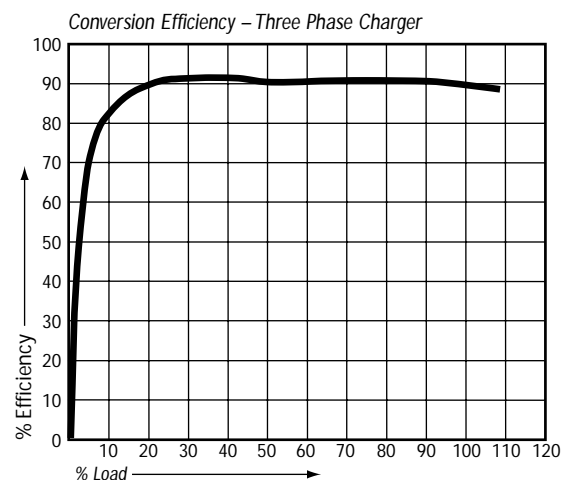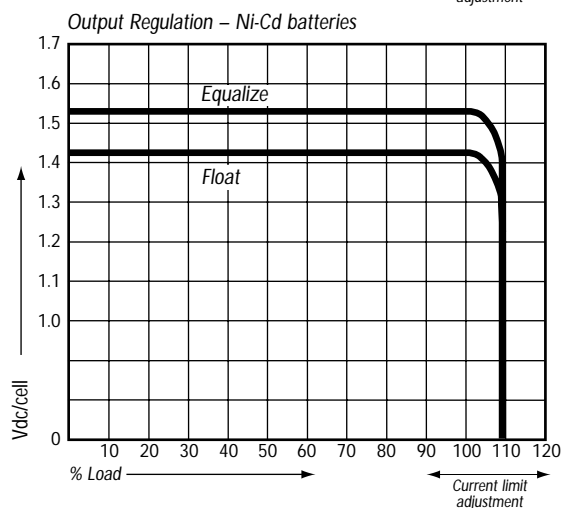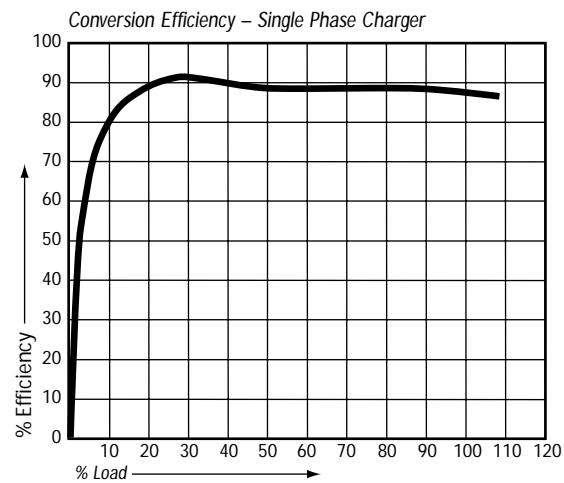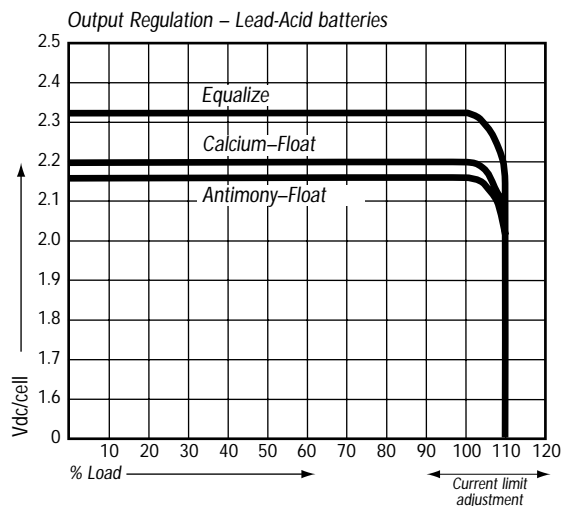



SCR/SCRF BATTERY CHARGER OPTIONAL ACCESSORIES

■ Alarm Relays for Remote Indication*

- AC Power Failure Alarm
- DC Ground Detection Alarms
- High-Low DC Voltage Alarms
- Charger Failure Alarm (No DC Current)
- Battery Discharging Alarm
- End of Discharge Alarm
- DC Current Limit Alarm
- Common (Summary) Alarm

Available with or without front panel alarm indicating lights.
 Provides alarm state when AC power fails or AC breaker is open.
 Provides alarm state when a ground fault has occurred at either the "+" or "-" output terminal.
 Provides high alarm state when battery is being overcharged and low alarm state when battery is near end of discharge.
 Provides alarm state when charger output current is less than 2% of rated output for 30 seconds or more. Will also activate with AC power failure and/or DC breaker or fuse open.
 Provides alarm state when battery discharge current exceeds the charger recharge current.
 Provides alarm state when battery has discharged to lowest system voltage limit.
 Provides alarm state when charger output current reaches the current limit setting.
 Provides a single alarm state when any one or all monitored alarm conditions exist on charger.

*Alarm circuits provide one (1) set of dry form "C" contacts (SPDT) wired to a terminal strip for customer termination. • Alarm circuits with two (2) sets of dry form "C" contacts (DPDT) are available without indicating lights at additional cost. • Standard relay contacts are rated for resistive loads of: 1A @ 120Vac, 2A @ 28Vdc, 1A @ 52Vdc, 0.1A @ 130Vdc. Auxiliary relays are available for use with alarm circuits when alarm load exceeds the standard contact rating. Auxiliary relay contacts are rated for resistive loads of: 5A @ 120Vac, 5A @ 28Vdc, 2A @ 52Vdc, 0.5A @ 130Vdc.

■ CASM, Combined Alarm - Status Monitor*

- High-Low AC Voltage Alarm Relay
- High DC Voltage Alarm Relay
- Low DC Voltage Alarm Relay
- Ground Detection Alarm Relay
- Charger Failure Alarm Relay
- Common Alarm Relay

The following alarm relays are available combined together on a single board. Each relay has one (1) set of isolated, dry form "C" contacts (SPDT) wired to a terminal strip for customer connection. Two (2) sets of form "C" contacts (DPDT) are available at additional cost, as are one (1) set of latching relays.
 With High and Low Indicating Lights, 15 second Time Delay on Alarm, Auto Reset.
 With Indicating Light, 15 second Time Delay on Alarm, Auto Reset.
 With Indicating Light, 15 second Time Delay on Alarm, Auto Reset.
 With (+) Ground Detection Indicating Light and (-) Ground Detection Indicating Light, 15 second Time Delay on Alarm, Auto Reset.
 With Indicating Light, 30 second Time Delay on Alarm, Auto Reset
 Summary Alarm Relay for any one or all alarms on this board.

*Alarm contacts are rated for 0.5A @ 120V AC or DC. Indicating lights are red LED's front panel mounted. A "Lamp Test" switch is provided for verifying operation of indicating lights. Customer terminal strip is rated 15A @ 120V AC or DC to accommodate #14AWG maximum wire. This option may be ordered without Ground Detection for DC systems that are referenced to ground.

■ DC Ground Detection for Local Indication

- Ground Detection Switch for Front Panel DC Voltmeter Indication
- Ground Detection Indicating Lights with Ground Test & Lamp Test Switch

Measures voltage from "+" or "-" output terminals to common ground.
 Front panel lamps indicate "+" or "-" output ground fault with switch in "Ground Test" position. In "Lamp Test" position both lights are verified as operational.

■ Equalize Timers

- 0-72hr Manual Equalize Timer w/ or w/o Float Equalize Indicating Lights
- 0-72hr Line Failure Auto-Equalize Timer w/ Float Equalize Indicating Lights
- 0-72hr Current Limit Auto-Equalize Timer w/Float Equalize Indicating Lights

Replaces Float/Equalize Switch. Charger automatically switches from "Equalize" to "Float" at end of set time interval.
 Charger is switched to equalize for a set time interval after power is interrupted for 10 seconds or more. Equipped with "Float Reset" and "Equalize" override switches.
 Charger is switched to equalize for a set time interval after charger is in current limit for 10 seconds or more. Equipped with "Float Reset" and "Equalize" override switches.

■ AC Fuse

Two pole AC Fuse for single phase, 3-pole AC Fuse for 3-Phase

■ DC Circuit Breaker

Two pole DC Breaker is installed with one-pole standard fuse:

- 5000 A.I.C., UL Listed 100A-Frame
- 10000 A.I.C., UL Listed 250 & 400A-Frame
- 14000 A.I.C., UL Listed 600 & 800A-Frame
- Optional higher AIC circuit breakers are available

■ Forced Load Sharing

Chargers operating in parallel share load to within 2% of output current of each charger. A contact closure from a High DC Voltage Alarm activates the shutdown circuit and charger output current goes to zero.

■ High DC Voltage Charger Shutdown

Output ripple voltage is 30mVrms or 0.06% of nominal output voltage, whichever is higher, without battery connected.

■ Filtered Battery Eliminator

■ Input Lightning Arrestors

Provides additional input protection against lightning induced transients, ANSI 37.90A.

■ Surge Withstand Capability

Additional surge protection to meet performance requirements of IEEE-472 SWC Specification.

■ AC Input Voltmeter and/or Ammeter


Front panel, 2% accuracy, 3.5 inch case, 1% 3.5 inch case, 1% 4.5 inch case, switchboard or digital.

■ Additional Optional Accessories


- Special Input Voltages and Frequencies
- Special High Interrupting Capacity (A.I.C.) Circuit Breakers
- 1% Accuracy Panel or Switchboard Meters

- Device Nameplates
- Fungus Proofing (Tropicalization)
- Drip-proof Cabinet Shields
- Alarm Buzzer
- Special Paint
- NEMA-4 or NEMA-12 Cabinets
- Special Hypalon Internal Wiring, switchboard type
- Cabinet Heater Strips
- Export Packing


TYPICAL SCR/SCRFB BATTERY CHARGER INTERNAL CONSTRUCTION DETAIL

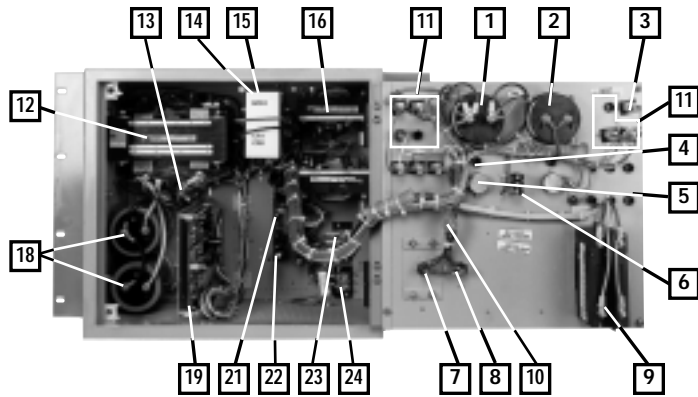

STYLE 1A CABINET CONSTRUCTION

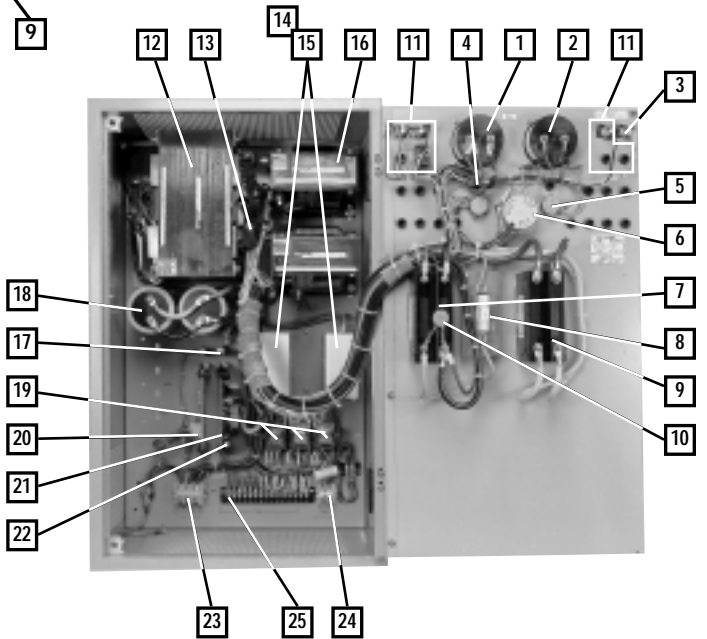

STYLE 1B CABINET CONSTRUCTION

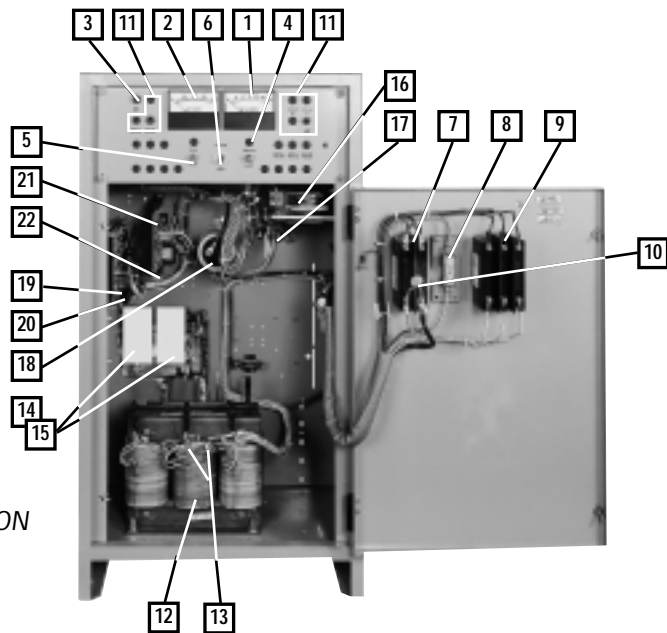

STYLE 2 CABINET CONSTRUCTION

1. DC AMMETER
2. DC VOLTMETER
3. AC POWER "ON" LIGHT
4. EQUALIZE ADJUST LIGHT
5. FLOAT ADJUST POT
6. EQUALIZE TIMER (optional)
FLOAT EQUALIZE SWITCH (standard)
7. DC CIRCUIT BREAKER (optional)
8. DC FUSE(S)
9. AC CIRCUIT BREAKER
10. DC SURGE SUPPRESSOR
11. STATUS INDICATING LIGHTS
& SWITCHES (optional)
12. POWER ISOLATION TRANSFORMER
w/AC RECONNECTION T.B.
13. AC SURGE SUPPRESSORS
14. SCR RECTIFIER/HEAT SINK ASSEMBLY
15. POLARITY & BLOCKING
DIODE ASSEMBLIES
16. FILTER CHOKE(S)
17. BLEEDER RESISTOR
18. FILTER CAPACITORS
19. ALARM RELAY(S) (optional)
20. ALARM CONTROL MODULES (optional)
21. CONTROL MODULE
22. CURRENT LIMIT ADJUST POT
23. INPUT LINE & GROUND TERMINALS (TB1)
24. OUTPUT TERMINALS (TB2)
25. REMOTE ALARM TERMINALS (TB3)



SCR/SCRF BATTERY CHARGER HEAT LOSS, SIZE & WEIGHT DATA TABLE

		12Vdc		24Vdc			48Vdc			130Vdc			260Vdc**		
AMPERE RATING**	HEAT LOSS BTU/HR*	CABINET STYLE	SHIPPING WEIGHT (approx) LBS(KG)	HEAT LOSS BTU/HR*	CABINET STYLE	SHIPPING WEIGHT (approx) LBS(KG)	HEAT LOSS BTU/HR*	CABINET STYLE	SHIPPING WEIGHT (approx) LBS(KG)	HEAT LOSS BTU/HR*	CABINET STYLE	SHIPPING WEIGHT (approx) LBS(KG)	HEAT LOSS BTU/HR*	CABINET STYLE	SHIPPING WEIGHT (approx) LBS(KG)
Single Phase Input															
6	70	1A	80 (36)	95	1A	90 (41)	170	1A	105 (48)	370	1B	125 (57)	670	2	230 (104)
12	135	1A	90 (41)	200	1A	105 (48)	330	1A	120 (54)	740	1B	160 (73)	-	-	-
16	180	1A	98 (44)	260	1A	115 (52)	440	1B	135 (61)	990	1B	210 (95)	1790	2	320 (145)
20	230	1A	105 (48)	320	1A	125 (57)	540	1B	160 (73)	1230	1B	220 (100)	-	-	-
25	290	1B	120 (54)	400	1B	135 (61)	680	1B	170 (77)	1540	1B	230 (104)	2790	3	490 (222)
30	340	1B	130 (59)	480	1B	150 (68)	810	1B	190 (86)	1850	1B	250 (113)	-	-	-
35	400	1B	135 (61)	560	1B	160 (73)	950	1B	210 (95)	2150	2	340 (154)	-	-	-
40	460	1B	145 (66)	640	1B	180 (82)	1080	1B	220 (100)	-	-	-	-	-	-
50	570	1B	160 (73)	800	1B	190 (86)	1350	2	245 (111)	3080	2	440 (200)	-	-	-
60	680	2	185 (84)	960	2	210 (95)	-	-	-	-	-	-	-	-	-
75	850	2	205 (93)	1200	2	245 (111)	2020	2	330 (150)	-	-	-	-	-	-
100	1130	3	280 (127)	1600	3	320 (145)	2700	3	440 (200)	-	-	-	-	-	-
Three Phase Input															
16													1260	2	350 (159)
20													-	-	-
25										1260	2	300 (136)	1960	3	510 (231)
30										1510	2	330 (150)	-	-	-
35				-	-	-	-	-	-	1760	2	355 (161)	2750	3	560 (254)
40				-	-	-	-	-	-	2010	2	380 (172)	-	-	-
50				740	2	210 (95)	1230	2	255 (116)	2510	3	500 (227)	3920	3	590 (268)
60	600	2	215 (98)	880	2	240 (109)	1480	2	320 (145)	3010	3	520 (236)	-	-	-
75	750	2	240 (109)	1100	2	275 (125)	1850	2	350 (159)	3760	3	550 (249)	5880	4	890 (404)
100	990	3	315 (143)	1470	3	360 (163)	2460	3	460 (209)	5010	3	680 (308)	7840	4	1000 (454)
125				1840	3	425 (193)	3080	3	500 (227)	6260	3	750 (340)	-	-	-
150				2200	3	480 (218)	3690	3	540 (245)	7510	4	915 (415)	11800	5	1480 (671)
175				2570	3	510 (231)	4300	3	600 (272)	8760	4	1010 (458)	-	-	-
200				2940	3	550 (249)	4920	3	650 (295)	10100	4	1100 (499)	15700	5	1610 (730)
250				3670	3	600 (272)	6150	4	750 (340)	12600	5	1400 (635)	-	-	-
300				4400	4	710 (322)	7380	4	860 (390)	15100	5	1500 (680)	23600	5	1950 (885)
400				5870	4	780 (354)	9830	4	950 (431)	20100	5	1650 (748)	-	-	-
500				7340	4	850 (386)	12300	5	1350 (612)	25100	5	1820 (826)	-	-	-
600				8800	4	925 (420)	14800	5	1500 (680)	30100	5	1950 (885)	-	-	-

*Heat loss in BTU/HR is stated for nominal number of cells at float voltage and 100% DC load current. **Consult factory for ampere and voltage ratings up to 1000A and 600V.

ORDERING INFORMATION

Specify:

- Charger model number: X SCR X XXX-XXX-X
 *1" or 3" phase input
 Omit for unfiltered, or add "F" for filtered
 *012;"024;"048;"130" or "260" nominal VDC output
 *006" to "600" rated Adc output
 Omit if not required, or add "-E" for filtered battery eliminator (SCRF units only)
- Nominal input (Vac) and frequency (Hz).
- Number and type of battery cells.
- All optional accessories required on charger

* Consult factory for higher DC voltage output and DC current outputs.

CABINET DIMENSIONS

CABINET STYLE	1A	1B	2	3	4	5
TYPE MOUNTING	WALL***	WALL***	FLOOR***	FLOOR	FLOOR	FLOOR
DIMENSIONS (inches)	H	15	26 1/4	37 3/8	49	62
	W	18 1/4	19	20 3/8	32	42
	D	12 1/8	15 1/2	14 3/4	24	24

***Rack mounting cabinet is optional for these styles.